

WDM-124PW



24" FHD 16:9 Stainless Steel Modular Touch Monitor



Applications

- Food & Beverage Processing
- Pharmaceutical Equipment
- Hospitality & Catering Service
- Chemical Critical Environment
- Animal Feed Production Facility

Features

- All-around IP67 Rating Protect Dust and Water
- Stainless Steel Front Frame and Aluminum Back Cover
- Patented Display Conversion Device (DCD) Technology
- Projected Capacitive Touchscreen
- 1920 x 1080 Resolution and 300nits Brightness
- -20°C ~ 60°C Operating Temperature

Ordering Information

Part No.	Description
WPM-124PW	24" 16:9 FHD (1920 x 1080), 300nits, Stainless Steel Touchscreen


Packing List

Description
1 x WDM-124P

Specifications

Model	WDM-124PW	
Display	Panel Size	24"
	Panel Type	LCD Panel
	Aspect Ratio	16:9
	Resolution	1920 x 1080 (FHD)
	Viewing Angle	178 (H) x 178 (V)
	Brightness	300cd/m ²
	Contrast Ratio	5000:1
	Color Support	16.7M
Touchscreen	Touchscreen Type	Projected Capacitive (PCAP)
	Surface Hardness	7Mohs
	Transparency	90% (±3%)
Environment	Operating Temperature	-20 ~ 60°C
	Storage Temperature	-30°C ~ 70°C
	Humidity	10~80%, Non-condensing
	Vibration	IEC 60068-2-64: 1Grms, random, 5~500 Hz, 1hr/axis
	Shock	IEC 60068-2-27: 15G, half-sine, 11ms duration
General	Certification	CE/FCC Class A
	Ingress Protection	IP67 Full System
	Material	Front Frame SUS 304 Stainless Steel, Back cover Aluminum
	Mounting	Yoke Mounting / Wall Mounting (Optional)
	Dimensions (W x H x D)	624 x 391.5 x 35mm
	Net Weight	12kg

Dimensions

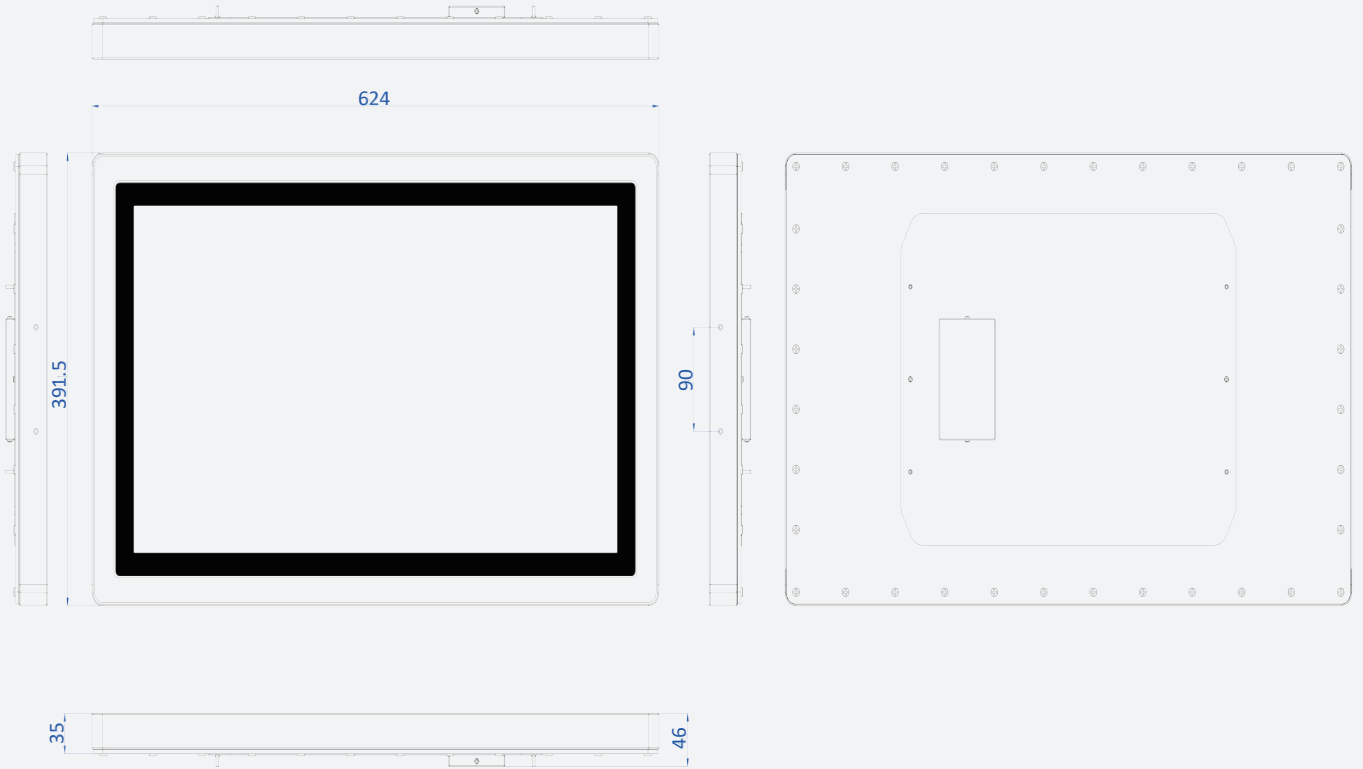

Viewing

Stainless Steel 304 Full IP67 for Waterproof

