

WVM-2100

Stainless Steel Video Module



Applications

- Food & Beverage Processing
- Pharmaceutical & Medical Industry
- Hospitality & Catering Service
- Chemical Critical Environment
- Animal Feed Production Facility

Features

- All-around IP67 Rating Protect Dust and Water
- Full Stainless Steel Enclosure with SUS 304
- Supports 1 x VGA by M12 Connector
- Touch Interface: 1 x USB and 1 x COM by M12 Connector
- Supports 9~48V DC Power Input by M12 Connector
- -10°C ~ 60°C Operating Temperature



Ordering Information

Part No.	Description
WVM-2100	Stainless Steel Video Module, M12 connectors for 1 x VGA, 1 x USB Touch Interface, 1 x COM Touch Interface, DC 9~48V

Packing List

Description
1 x WVM-2100


Optional Items

Part No.	Description
APW-60M12V-01	12V, 60W, 5A, 5-pin M12 Connector (US)
APW-60M12V-02	12V, 60W, 5A, 5-pin M12 Connector (EU)
AKT-VGA2M12-M	M12 Connector to DB15 Male Cable, 2m
AKT-TOU2M12	M12 Connector to Touch Cable, 2m

Specifications

Model		WVM-2100
Video Interface	VGA	1 x VGA, Max Resolution 1920 x 1200 (M12 Connector)
Touch Interface	USB	1 x USB2.0 (M12 Connector)
	Serial Port	1 x RS232 (M12 Connector)
Power	Power Supply Voltage	9~48V DC Power Input
	Power Connector Type	M12 Connector
	Power Adapter (Optional)	AC/DC 12V/5A 60W Power Adapter
	Protection	Over Voltage Protection (OVP) up to 52V Over Current Protection (OCP) up to 20A Reverser Voltage Protection (RVP) up to -48V
Environment	Operating Temperature	-10°C~60°C
	Storage Temperature	-20°C~70°C
	Humidity	10%~80%, Non-condensing
	Vibration	IEC 60068-2-64: 1Grms, random, 5~500 Hz, 1hr/axis
	Shock	IEC 60068-2-27: 15G, half-sine, 11ms duration
General	Certification	CE/FCC Class A
	Ingress Protection	IP67 Full System
	Thermal Dissipation	Fanless System
	Material	SUS 304 Stainless Steel
	Dimensions (W x D x H)	371 x 286 x 44mm
	Net Weight	3.16Kg

Dimensions

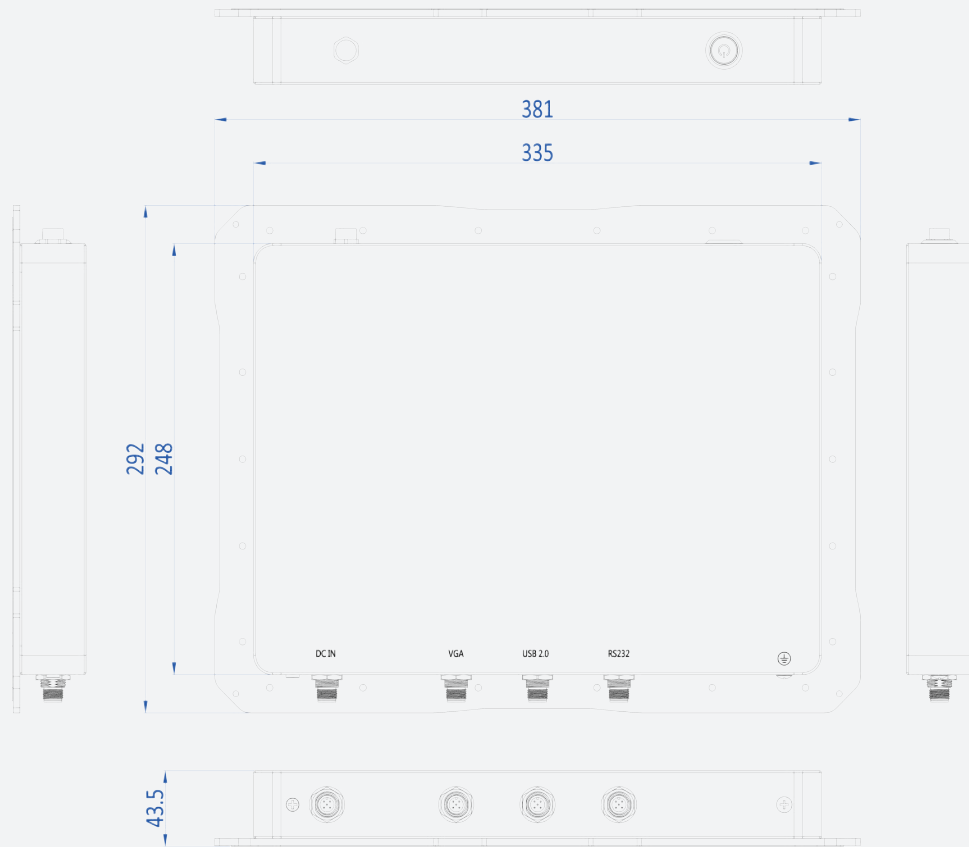

Viewing

